



Cy-ALR15 5-15 meter Reader
The NEW Solution – penetrates most metallic films



Outstanding Features:



- Bluetooth transmission technology
- Penetrates most metallic films without reducing read distance
- Built-in anti-collision mode and directional 120° reading angle
- Dual Frequency – 433 MHz tag wake-up and 2.4GHz transmit
- Tag battery tested to 150,000 reads, and still reading
- Easy battery change – just open and replace
- Uses cheap and easy to find CR2032 battery
- Tags available in windshield suction cups or dashboard stick-on types

Technical Parameters	
Wake-up frequency	433 MHz
Transmission frequency	2.4 GHz Bluetooth
Infra-red emission angle	60° Cone
Read Range	5 – 15 meters
Communication	
Communication Interface	RS232/485, WG26/34
Electrical Parameters	
Voltage	DC12V - 18V
Power Consumption	Below 400 mw
Physical Parameters	
Dimensions	378mm*260mm*110mm
Total extended Height	1.7m
Humidity	10% - 95%
Working Temperature	-40°C - 80°C

Windshield mount with suction cap



Multi-angle reader

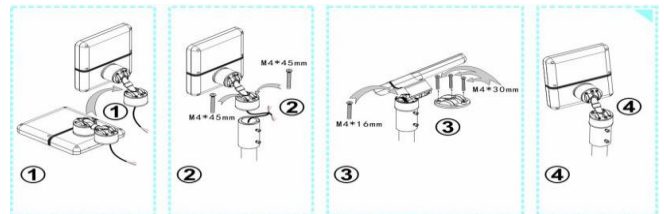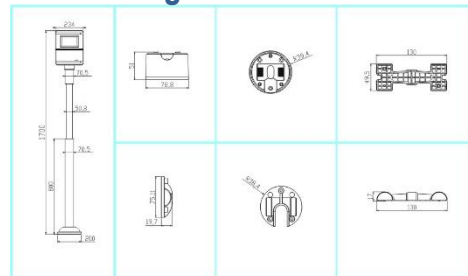

Contact Us

A 51A, 1ST Floor Jalan Kenari 17F,
 Bandar Puchong Jaya, 47100
 Puchong, Selangor DE,
 Malaysia.

M +6012 389 6301
 D +603 8075 2263
 F +603 80704487
 E enquire@abglobal.com.my
 W www.abglobal.com.my

