



Cy-ALR15 5-15 meter Reader
The NEW Bluetooth Solution -
penetrates most metallic films



FEUTURES:



- Bluetooth transmission technology
- Penetrates most metallic films without reducing read distance
- Built-in anti colission mode and directional 120° reading angle
- Dual Frequency – 433 MHz tag wake-up and 2.4GHz transmit
- Tag battery tested to 150,000 reads, and still reading
- Easy battery change – just open and replace
- Uses cheap and easy to find CR2032 battery
- Tags available in windshield suction cup or dashboard stick

Technical Parameters	
Wake-up frequency	433 MHz
Transmission frequency	2.4 GHz Bluetooth
Infra-red emission angle	60° Cone
Read Range	5 – 15 meters
Communication	
Communication Interface	RS232/485, WG26/34
Electrical Parameters	
Voltage	DC12V - 18V
Power Consumption	Below 400 mw
Physical Parameters	
Dimensions	378mm*260mm*110mm
Total extended Height	1.7m
Humidity	10% - 95%
Working Temperature	-40°C - 80°C

Active tag with suction cap for windshield



Multi-angle reader

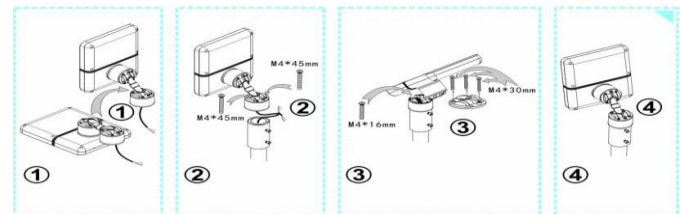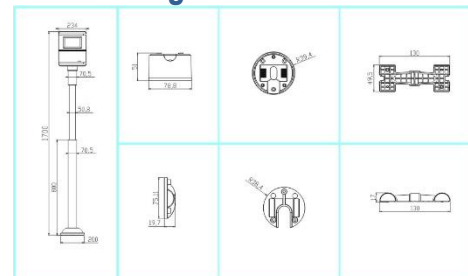

**Authorized
 Dealer**